


AUTOMATIC SKIP

GX

Tips and relocks by forklift mast tilts.
Automatic release.

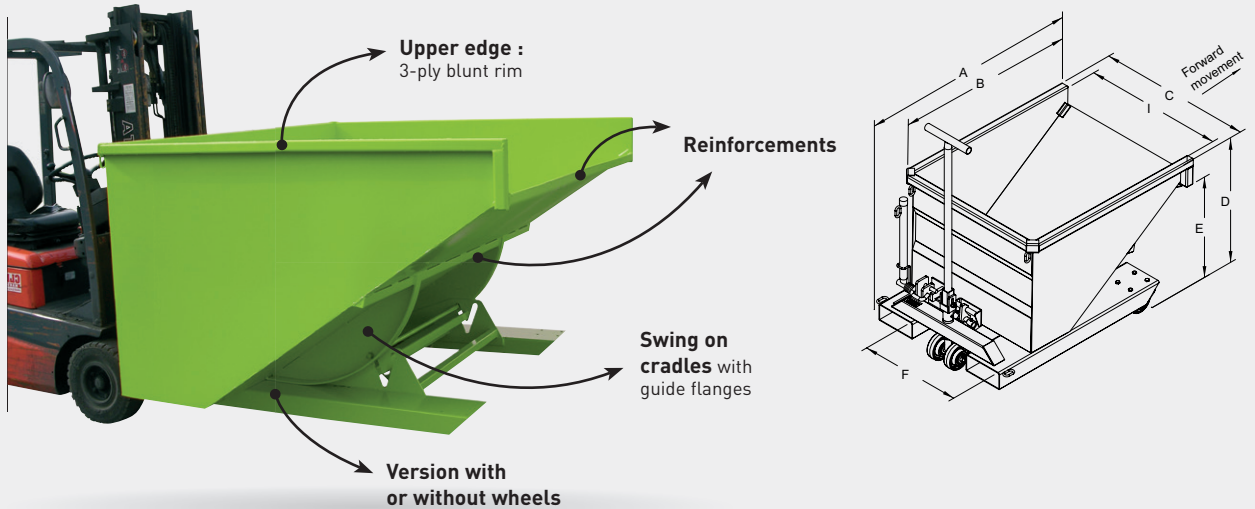

Castor-mounted model with drawbar



Galvanized pedestal-mounted model



Automatic release on contact

CHARACTERISTICS

- Capacity : 300 to 2550 litres
- Bin : 3 mm sheet metal
- Rigid tubular chassis : 4 mm sheet metal. Guide flanges : 6 or 8 mm sheet metal, integrated end-stop
- Safety latch for transport (disengage before tipping)
- Automatically unlocks and tips on contact (anti-slip device) and lever for manual tipping
- Fork sleeves can be modified on request. Aperture 200 x 80 mm. Spacing : see F in table
- Pedestal-mounted models (except the 300 L model) can be used with pallet trucks (between fork sleeves)
- Castor-mounted models (forward movement) have 2 fixed castors + 2 castors on a directional drawbar
- Safety chain included
- Options on request

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	E	F	Weight kg	Painted ref.
300	1200	-	1180	965	830	750	700	590	545	120	GXP03000
300	1200	125N	1190	965	830	750	770	670	545	130	GXP03120
500	1200	-	1295	1080	1080	1000	790	650	795	155	GXP05000
500	1200	125P	1300	1080	1080	1000	855	720	795	166	GXP05121
850	1500	-	1660	1440	1080	1000	1000	840	795	218	GXP08000
850	1500	160P	1690	1440	1080	1000	1115	960	795	228	GXP08161
1030	1500	-	1660	1440	1280	1200	1000	840	795	230	GXP10000
1030	1500	160P	1690	1440	1280	1200	1105	970	795	243	GXP10161
1270	1800	-	1935	1720	1080	1000	1180	980	795	270	GXP12000
1270	1800	160P	1965	1720	1080	1000	1300	1100	795	285	GXP12161
1530	1800	-	1935	1720	1280	1200	1180	980	795	289	GXP15000
1530	1800	160P	1965	1720	1280	1200	1300	1100	795	300	GXP15161
1910	2000	-	1935	1720	1580	1500	1180	980	795	314	GXP18000
1910	1800	160P	1965	1720	1580	1500	1300	1100	795	326	GXP18161
2550	2000	-	1935	1720	2080	2000	1180	980	795	360	GXP25000
2550	1800	160P	1965	1720	2080	2000	1300	1100	795	373	GXP25161

Dimensions in mm for basic model (for guidance only). Castors : N = Nylon, P = alu/polyurethane