


TIPPING SKIP WITH FRONT DOOR

BN

Minimum bulk - maximum capacity.
Perfect for collecting wood scraps, sawdust, bark etc...

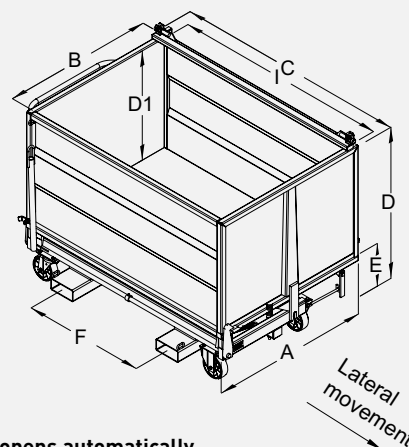

Door opens automatically
when emptying

Version with or without wheels



Door with
reinforcing rib



Lateral movement in
standard (modifiable
on request)



Independent chassis
with reinforced
articulation joint

CHARACTERISTICS

- Capacity : 1000 to 4800 litres
- Bin : 3 mm sheet metal with side bars and pleats
- Bin emptying angle : 43°
- Lever for manual tipping
- Safety latches on lever and door for transport (disengage before tipping)
- Fork sleeves can be modified on request. Aperture: 170 x 70 mm. Spacing : see F in table
- Pedestal-mounted models can be used with pallet trucks (between fork sleeves)
- Castor-mounted models have 2 fixed + 2 pivoting castors and a handrail
- Safety chain included
- Options on request

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	D1	F	Weight kg	Painted ref.
1000	2000	-	1240	1030	1400	1250	1160	772	900	260	BNP10000
1000	1800	160P	1240	1030	1445	1250	1260	772	600	276	BNP10161
1200	2000	-	1240	1030	1650	1500	1160	772	900	286	BNP12000
1200	1800	160P	1240	1030	1700	1500	1260	772	850	300	BNP12161
1570	2000	-	1200	1000	1650	1500	1425	1040	900	320	BNP15000
1570	1800	160P	1200	1000	1700	1500	1525	1040	850	337	BNP15161
2100	2000	-	1200	1000	2150	2000	1425	1040	900	375	BNP20000
2100	1800	160P	1200	1000	2200	2000	1525	1040	900	390	BNP20161
2700	2500	-	1520	1300	2150	2000	1435	1040	900	430	BNP27000
2700	2400	200C	1520	1300	2200	2000	1565	1040	900	460	BNP27202
3500	2800	-	1520	1300	2150	2000	1715	1330	900	487	BNP35000
3500	2400	200C	1520	1300	2200	2000	1855	1330	900	519	BNP35202
4800	3500	-	2100	1795	2165	2000	1740	1330	900	614	BNP50000

Castors: P= Alu/polyurethane, C=Cast iron/polyurethane - Dimensions in mm for basic model (for guidance only).

OPTIONS AND FUNCTIONS OF USE



*Lid with inspection
window and ferrule
Leakproof door with seal*



*Fixed lid (welded)
with ferrule*



*2-parts lid
with waterproof
moving part*



*Leak proof inspection window (TEP)
300x300mm*

*Lid with special aperture on request
and visualization window*



*2 gas cylinders
on special lid*



Hydraulic tipping

